

# YK SERIES (Single Phase Filters)




## Features

- The YK series is general purpose single phase filter.
- The rated current can be offered from 1 to 10 amps.
- The compact size for easy installation and space saving.
- Various output selections such as fast-on terminal, and lead wire.
- Low leakage current version upon requested.
- All parts are approved by UL ,CSA ,VDE and CE
- Applications comprising Electrical and electronic equipment, household equipment, Medical equipment, Datacom equipment, Test and measurement equipment, Fitness machine.

## Technical Specification

Rated voltage	125/250VAC
Rated currents	1 to 10A
Operating frequency	50/60Hz
Hipot rating(Line-to-line)	1450VDC
Hipot rating(Line-to-ground)	2250VDC
Operating temperature	-25~+85°C
Safety compliance	UL,CSA,VDE,CE

## Typical electrical schematic

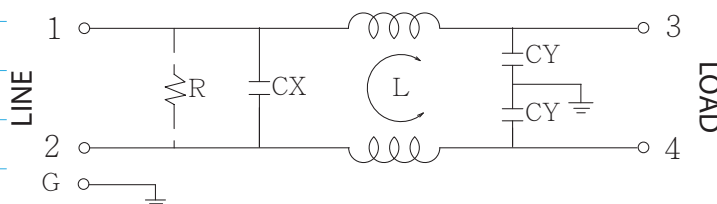


\*With optional ground choke and resistor.  
R: 1M ohm, 1/4W min.

## Filter Selection Table


Part No.	Rated Current (A)	Inductance L(mH)	Capacitance CX( $\mu$ F)	Capacitance CY(pF)	Output connections
YK01T1	1				Fast-on terminal (optional lead-wire)
YK03T1	3				
YK06T1	6				
YK10T1	10				

# Physical Dimensions: (mm)

YK-T1

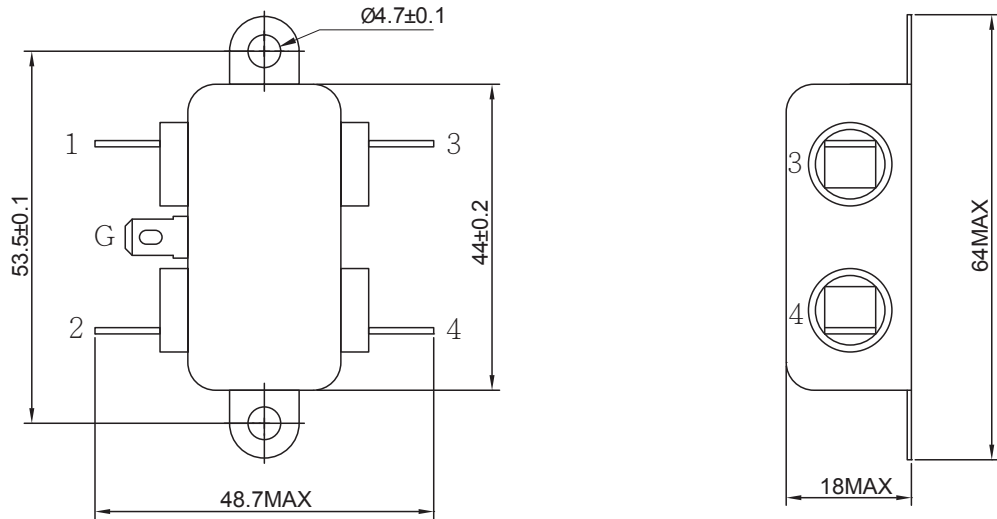

YK-T (Lead-wire)

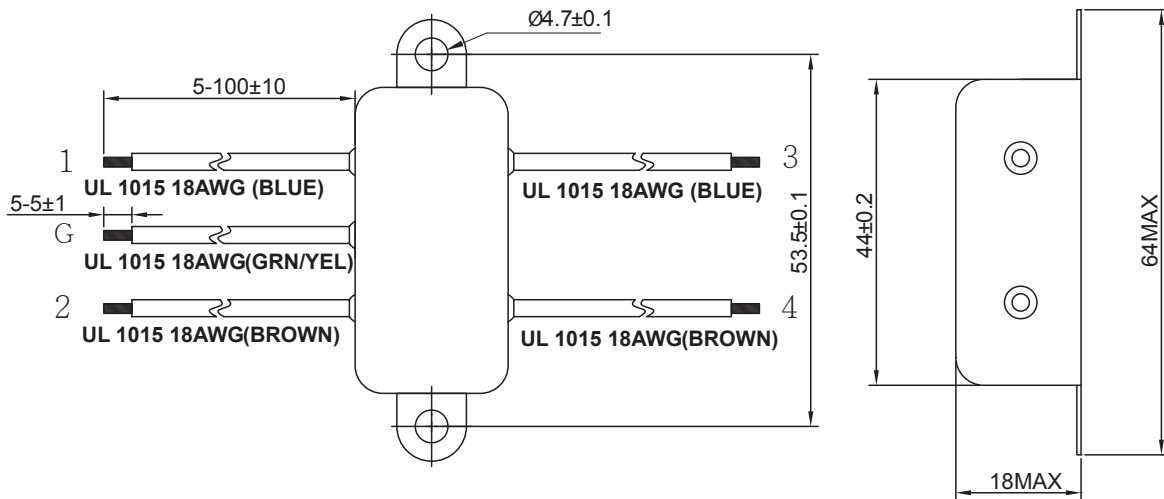

## Typical filter attenuation (Common mode — Normal mode —)

